

SWAGELESS COMPRESSION TERMINALS

Metric Threads

Benefits


The Unique star shaped Crown Ring positions and holds the wire strands in place, eliminating the requirement for awkward wire end bending. The shallow angled cone establishes direct mechanical grip on the core and all other outer strands. Stainless steel grade EN10088 1.4404 (316) is used on all parts with the exception of the crown ring which is manufactured from Aluminium Bronze. No sealant or packing is required.

Wire Construction

The part codes in the table are for 1 x 19 wire rope construction. Different Cones and Crown Rings are used for 7 strand, compact strand and Dyform®.

Add suffix -7 for 7 Strand wires.

Please refer to your re-seller for the relevant coding for Compact Strand or Dyform®.

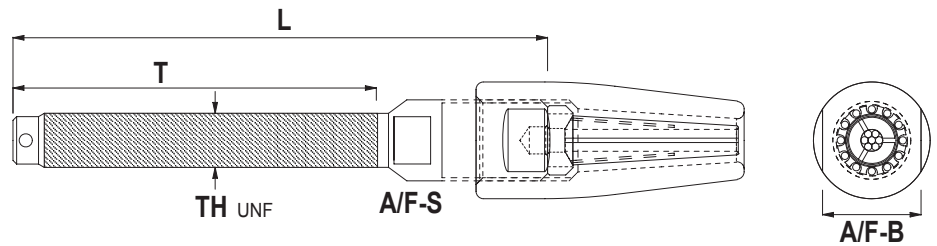

Swageless Compression Terminals - Metric Threaded Studs							
Product Code	W	Thread	T	L	A/F-S	A/F-B	Weight
CTSM6X03	3mm	M6	47mm	63mm	6mm	9.5mm	24g
CTSM6X04	4mm	M6	47mm	68mm	8mm	11mm	35g
CTSM8X04	4mm	M8	54mm	74mm	8mm	11mm	42g
CTSM8X05	5mm	M8	54mm	80mm	9mm	14mm	65g
CTSM10X05	5mm	M10	68mm	90mm	9mm	14mm	75g
CTSM10X06	6mm	M10	68mm	95mm	11mm	17mm	110g
CTSM12X06	6mm	M12	90mm	117mm	11mm	17mm	145g
CTSM12X07	7mm	M12	90mm	123mm	14mm	20mm	199g
CTSM12X08	8mm	M12	90mm	129mm	16mm	22mm	297g
CTSM16X08	8mm	M16	100mm	134mm	16mm	22mm	340g
CTSM16X10	10mm	M16	120mm	158mm	19mm	26mm	800g

Please ensure you use the correct code for your construction of wire

Wire Construction

The part codes in the table are for 1 x 19 wire rope construction. Different Cones and Crown Rings are used for 7 strand, compact strand and Dyform®. Add suffix -7 for 7 Strand wires. Please refer to your re-seller for the relevant coding for Compact Strand or Dyform®.