


MARINE SHACKLES

Stainless Steel 316 Long D and Long Twist

Benefits

Contrary to upset forms produced in several press operations, electrical upsetting produces no kinks or interruption of grain flow. The surface of the shackle is free from wrinkles or burrs. The cold shank remains totally undamaged.

Even when the shackle heads are pressed into their final shape, the grain structure of the external contour retains a high degree of accuracy.

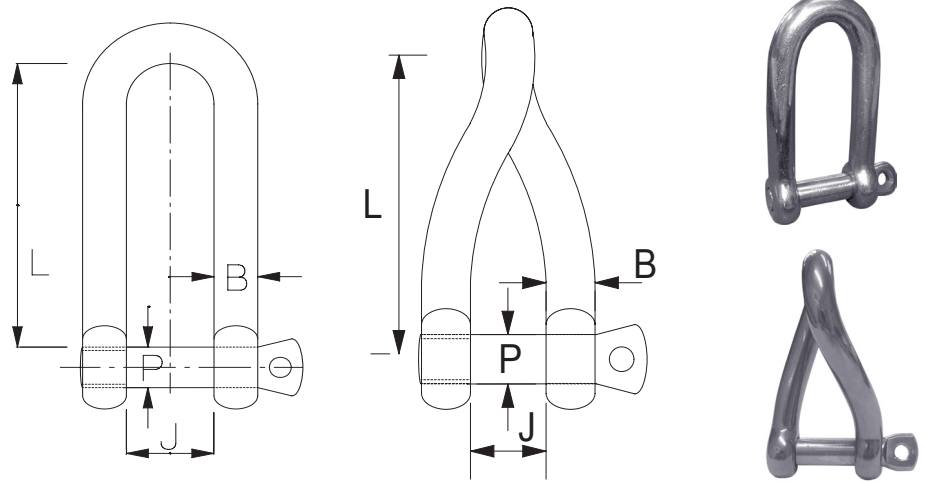

Inspection certificate BS EN10204 3.1b available on request. This must be specified at the time of order.

Shackle Pin Types

Pin	Description	Sizes
	Standard Screw Pin	4mm to 19mm
	Shake Proof Retain Pin	5mm to 16mm
	Socket Head Pin	5mm to 19mm

Suffix Code with pin type.
 No Suffix - Standard Pin
 RS - Shake Proof Pin
 C - Socket Head Pin

Stainless Steel 316 Long D Shackles						
Product Code	Pin P	Body B	Jaw J	Inside L	M.B.L. *	Weight
LD04	4mm	4mm	8mm	24mm	600 Kgs	12g
LD05	5mm	5mm	10mm	29mm	1200 Kgs	116g
LD06	6mm	6mm	13mm	43mm	1600 Kgs	32g
LD08	8mm	8mm	16mm	49mm	2400 Kgs	69g
LD10	9.5mm	9.5mm	19mm	55mm	3800 Kgs	117g
Stainless Steel Grade 316 Long Twist Shackles						
LT04	4mm	4mm	8mm	23mm	600 Kgs	12g
LT05	5mm	5mm	10mm	26mm	1200 Kgs	116g
LT06	6mm	6mm	13mm	40mm	1600 Kgs	32g
LT08	8mm	8mm	16mm	45mm	2400 Kgs	69g
LT10	9.5mm	9.5mm	19mm	50mm	3800 Kgs	117g
Larger Shackles Manufactured to Order						

* typical minimum breaking load

Refer to shake proof and socket head shackle specification sheet for details of pins. Specialist shackles to OEM design also available. Contact our sales department for a very competitive quote.