

TURNBUCKLES

Closed Body with Toggle and Blank

Benefits


Stainless steel grade 316 closed body with Aluminium Bronze thread inserts for sizes 8mm to 26mm.

Eyes are manufactured to a very high standard using the latest technology in electrical upsetting forging.

All raw materials used to manufacture these parts are certified to EN10204 3.1b.

Inspection certificate BS EN 10204 3.1B available on request (This must be specified at the time of order).

High quality finish and excellent polish.

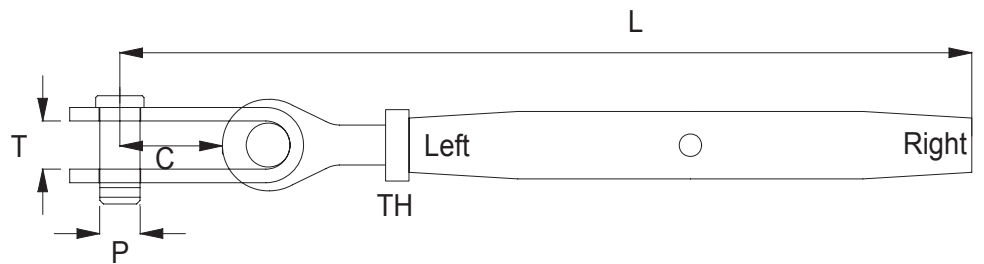

Closed body turnbuckle with toggle and blank								
Product Code	Wire	Therad	P	T	C	Min L	Max L	Weight
RSTB03	3mm	1/4" unf	6.0mm	8.0mm	14.0mm	132mm	167mm	51g
RSTB04	4mm	5/16" unf	8.0mm	9.0mm	18.0mm	150mm	189mm	102g
RSTB05	5mm	3/8" unf	9.50mm	11.0mm	21.0mm	181mm	231mm	186g
RSTB06	6mm	7/16" unf	11.0mm	13.0mm	25.0mm	205mm	259mm	316g
RSTB07	7mm	1/2" unf	12.0mm	15.0mm	27.0mm	238mm	304mm	456g
RSTB08DS	8mm	1/2" unf	12.0mm	15.0mm	27.0mm	230mm	300mm	456g
RSTB10	10mm	5/8" unf	16.0mm	19.0mm	36.0mm	314mm	392mm	1065g
RSTB12	12mm	3/4" unf	19.0mm	22.0mm	45.0mm	375mm	461mm	1708g
RSTB14	14mm	7/8" unf	22.0mm	25.0mm	53.0mm	421mm	520mm	2883g
RSTB16	16mm	1" unf	25.4mm	28.0mm	62.0mm	492mm	612mm	3837g
RSTB19	19mm	1 1/8" unf	28.0mm	32.0mm	63.0mm	560mm	695mm	3983g
RSTB22	22mm	1 1/4" unf	32.0mm	35.0mm	76.0mm	603mm	745mm	5735g
RSTB26	26mm	1 3/8" unf	35.0mm	38.0mm	92.0mm	695mm	858mm	11902g

Other end fittings available include forks, swage studs, toggles and shackle toggles

All products are produced to a high degree of quality control, using modern lean manufacturing processes, resulting in a reliable and consistent product