

STAINLESS STEEL SHACKLE TOGGLE

Threaded Terminals - Shackle Toggle Studs RH & LH


Benefits

Electrical upsetting with beneficial grain structure and low stress levels to reduce fatigue.

All threads are precision forged or cut to BS3643 part 1 and 2 and BS1580 part 1 and 2.

Free from structural welds which may reduce the strength and integrity of the product.

All eyes are manufactured from solid bar - no welding involved.

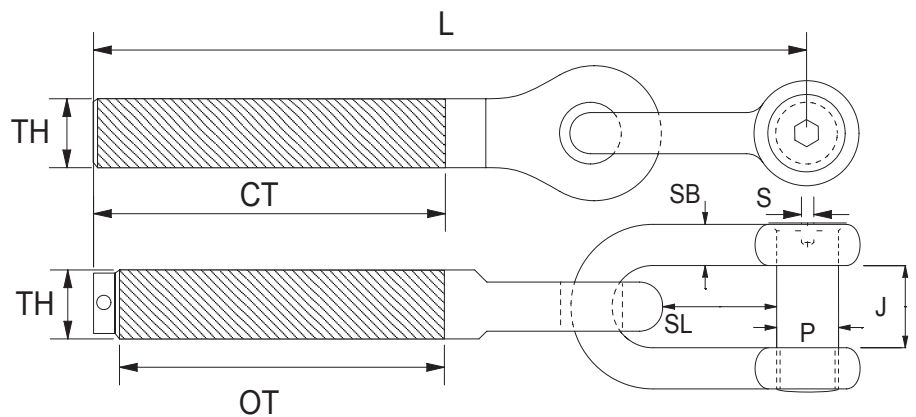

Threaded Terminals - Shackle Toggle Studs RH & LH										
Product Code	Thread	P	SB	SL	S	J	L	CT	OT	Weight
STS#03	1/4" unf	6mm	5mm	14mm	3mm	14mm	82mm	47mm	42mm	23g
STS#04	5/16" unf	8mm	6mm	16mm	4mm	20mm	101mm	54mm	49mm	43g
STS#05	3/8" unf	9.5mm	8mm	22mm	4mm	22mm	118mm	68mm	63mm	78g
STS#06	7/16" unf	11mm	9.5mm	27mm	5mm	25mm	141mm	75mm	68mm	129g
STS#07	1/2" unf	12mm	11mm	32mm	5mm	27mm	158mm	90mm	83mm	221g
STS#08	5/8" unf	14.3mm	12.7mm	36mm	5mm	29mm	179mm	100mm	93mm	455g
STS#10	5/8" unf	16mm	14.3mm	42mm	6mm	29mm	216mm	100mm	93mm	686g
STS#12	3/4" unf	19mm	16mm	45mm	6mm	32mm	263mm	120mm	111mm	995g
STS#14	7/8" unf	22.2mm	19mm	63mm	8mm	38mm	309mm	140mm	130mm	1536g
STS#16	1" unf	25.4mm	22mm	63mm	8mm	45mm	351mm	160mm	150mm	2575g

Replace # with C for Closed Style (CT) or O for Open Style (OT)

All products are produced to a high degree of quality control, using modern lean manufacturing processes, resulting in a reliable and consistent product